



Drying cabinet

DC 4



Features

- Flexible construction allows hanging bars to slide easily forward for easy access to garments or down for more space
- Easy to install; the evacuating channel is connected to the ventilation system and the humid air is transported out of the room
- All electrical components are placed on the top which makes it easy to maintain
- Pull-out hanging system
- 3 temperatures; high, normal, low
- Energy efficient
- Overheat protection
- IP 24 classification.
- CE-approved

Markets

Day care center, Schools, Road workers dressing room, Ships, Airports, Ski resorts, Campings, Security



DC4


Loading capacity	4 kg/8,8 lbs
Drying capacity	17 g/min*
Hanging length	16 m/52,5 feet
Heating effect	1,5 kW
Total effect	1,535 kW
Energy consumption economy /kg	0,5 kWh
Energy consumption express /kg	0,6 kWh
ELECTRICAL CONNECTIONS	
Standard electrical connection	220-240/50/60 Hz/1phase
Fuse	10 A
Total effect	1,535 kW
Heating elements	1,5 kW
AIR CONNECTIONS	
Outlet exhaust	∅ 100 mm/3,94 inch
Outlet air flow	45 m ³ /h
Pressure drop	max 60 Pa
Dewatering capacity	17 g/min*
SOUND LEVEL	
Airborne sound level	60 dB(A)
SHIPPING DATA	
Net	61 kg/134,5 lbs
Crated	4 kg/8,8 lbs
Shipping data net	65 kg/143 lbs
Shipping volume	0,2 m ³
DIMENSIONS	
Width	595 mm/23,4 inch
Depth	619 mm/24,4 inch
Height	1939 mm/76,3 inch

*Valid for high-spinned textiles.

FRONT



LEFT SIDE

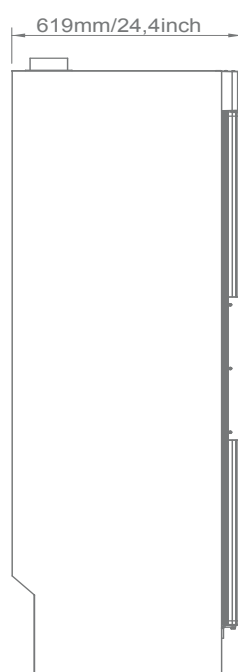

REAR SIDE

